

These are hard hitting scalers with the options of quick chisel changes. Select from a variety of chisels to remove unwanted accumulated layers.

Features

- Hardened steel cylinder - durable.
- Pistol grip handle.
- Variety of chisels available.
- High power to weight ratio.
- Lightweight - easy to use and manoeuvre.
- Simple to maintain - few moving parts.
- Quick change retainer system - chisels and accessories can be changed quickly.

Applications

- Cleaning of weld splatter and flux.
- Descaling.
- Reaching hard to reach areas.
- Paint removal.
- Corrosion removal, prior to re-coating or painting.
- General surface preparation.

These tools are great for use in general industry, shipyards, maintenance of sea going vessels, offshore platforms etc.



Technical data

IMPA Code	590581	590582	590583
Teryair Model No	SC24ST	SC24PG	SC29PG
Type	Inline	Pistol Grip	
Blows per min	3000	3000	2200
Air Consumption ltrs/sec (cfm)	2.6 (5.5)	2.6 (5.5)	3.8 (8)
Air Inlet Size inch	NPT 1/4		
Length mm (inch)	370 (14.5)	340 (13.4)	370 (14.5)
Weight kgs (lbs)	2.0 (4.4)	2.0 (4.4)	2.6 (5.8)
Standard Accessories	Chisel 1/2" sq, 7" Long, 3/4" Wide, JC0175F19 - 1pc		

Package dimensions and weights

Teryair Model No	Weight kgs	Box Dimensions cms
SC24ST	2.5	7 x 7 x 41
SC24PG	3.5	35 x 19 x 7
SC29PG	4.0	35 x 19 x 7


Accessories and spares

See page 23 for jc series chisel list





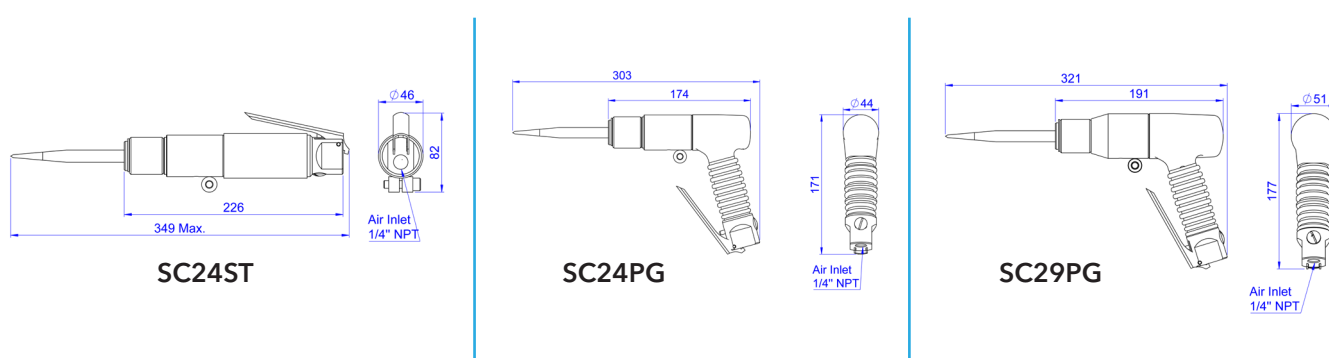

Standard equipment included

Chisel 1/2" sq, 7" Long, 3/4" Wide, JC0175F19 - 1pc

Dimension drawing



Chisels for use with chisel scalers.
Suits most brands of chisel scalers.

Images	IMPA Code	Blade Size mm		Type	Teryair Part No
		Width mm (inch)	Length mm (inch)		
	590591	19 (3/4)	175 (7)	Flat	JC0175F19
	590592	19 (3/4)	254 (10)		JC0250F19
	590593	62 (2-1/2)	175 (7)		JC0175F65
	590594	62 (2-1/2)	254 (10)		JC0250F65
	590595	34 (1-3/8)	175 (7)	Cranked	JC0175C35
	591901	19 (3/4)	175 (7)	Flat	JD0175F19
	591902	62 (2-1/2)	175 (7)		JD0175F65
	591903	50 (2)	175 (7)	Flat	JD0175F50
	591904	34 (1-3/8")	175 (7)	Cranked	JD0175C35
	591905	19 (3/4)	254 (10")	Flat	JD0250F19